

P 900

HIGH PERFORMANCE

LIFETIME EXCELLENCE



HIGHLIGHTS

- The secondary control (including colour display and seat) allows full second operation on the turntable offers the complete operation of all platform movements as well as the optimum view of the boom system.
- GPD-Gravity Powered Drive allows an operation even when the engine is switched off and provides a safe return to the ground at any time.
- An integrated hydraulic tank in the base frame ensures a low centre of gravity during on-road driving.
- Telescopic cage with 530 kg cage load and integrated preparation for Powerlift system.
- Wind speed 7 Upgrade allows working at market leading unattained working conditions.
- 180° horizontal cage boom rotation
- 930 mm stabilising stroke to compensate for highly uneven terrain
- Upgraded to wind speed 7 (15.5m/s) which allows operations that were not previously permitted due to wind speed restrictions.
- Extra-large storage space and illuminated tool boxes on the loading area provide space for all work equipment.

STANDARDS














- Memory function
- Automatic stabilizer and levelling systems
- Anemometer
- Seat in the cage
- Mobile Intercom System
- 4 working lights at the subframe for illumination of stabilizing area
- Multiple emergency lowering systems from the basket and base
- Emergency drive via electrical pump
- Hydraulic electricity generator 400 V 6,6 KVA

OPTIONS

- Powerliftsystem with two boom winches
- Additional access ladder to the secondary control
- Illumination-Packages




TECHNICAL SPECIFICATIONS

	Total weight*	48000 kg		max. outreach	32,50 m
	Overall length	16,20 m		Rotation angle of turntable	500°
	Width in transportposition	2,54 m		Rotation angle of cage	+/-85°
	Height in transportposition	3,99 m		Rotation angle of cage boom	180°
	max. stabiliser width	8 m		Size of cage	3,88 x 1,05 x 1,10 m
	max. working height	90 m		max. cage load	530 kg
	max. cage bottom height	88 m			


* Depends on truck chassis

WORKING DIAGRAMS

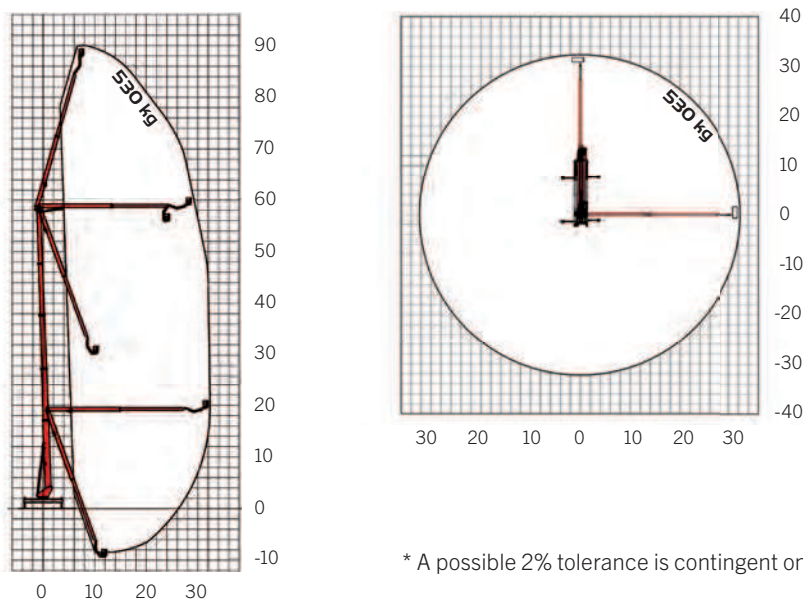

* A possible 2% tolerance is contingent on structural components

DIMENSIONS

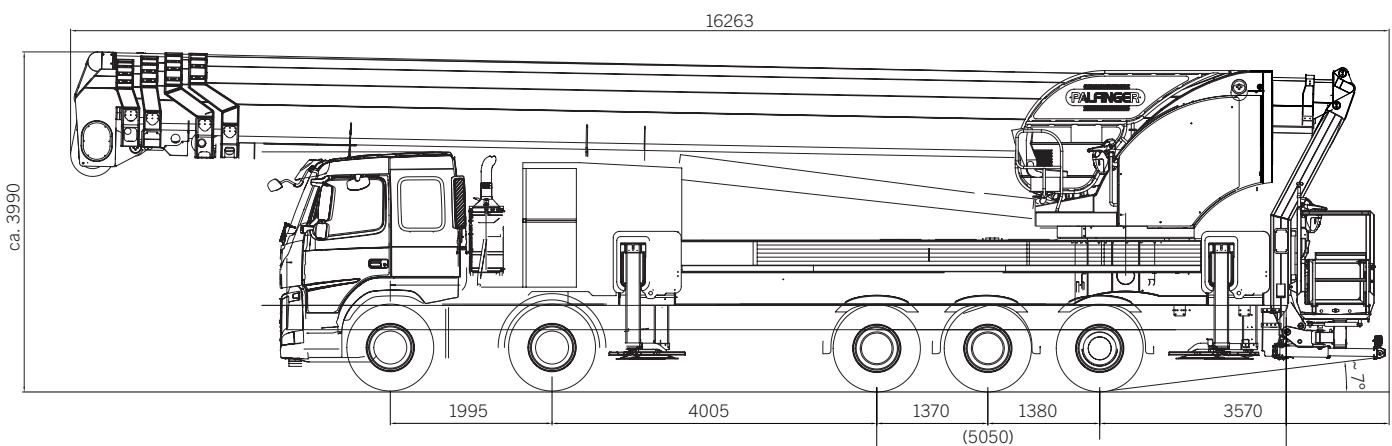

YOUR CONTACT

Palfinger Platforms GmbH

Düsseldorfer Str. 100
47809 Krefeld | Germany

KP-P900M2+EN

Units shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.